

# LED SMD Bulbs

## Standard



CB CE ErP  



No Flicker



Dimmable  
Option



Ra80/90



15000  
-25000h



S: 220-240V



For Indoor



>0.5/0.9



E26



E12



C37

C37T

A60

A70

A80

G125

G95

A65

A55

A50

G45

01

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-C37-E2/3/5/6/7	Φ37*98	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	40*20*23
XGY-SMD-C37T-E2/3/5/6/7	Φ37*130	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	40*20*29
XGY-SMD-G45-E2/3/5/6/7	Φ45*78	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	47*24*18.5
XGY-SMD-A50-E5/6/7	Φ50*96	5/6/7W	80-180lm/W	3000K-6500K	270°	100	52x27x24
XGY-SMD-A55-E6/7	Φ55*98	6/7W	80-180lm/W	3000K-6500K	270°	100	57x29x24
XGY-SMD-A60-E7/9/12/15	Φ60*110	7/9/12/15W	80-180lm/W	3000K-6500K	270°	100	63x32.5x24
XGY-SMD-A65-E15/18	Φ65*125	15/18W	80-180lm/W	3000K-6500K	270°	100	67x34.5x29.6
XGY-SMD-A70-E14/18	Φ70*135	14/18W	80-180lm/W	3000K-6500K	270°	100	77x37x32.5
XGY-SMD-A80-E20	Φ80*159	20W	80-180lm/W	3000K-6500K	270°	100	82x42x35.6
XGY-SMD-G95-E10/15/18	Φ95*135	10/15/18W	80-180lm/W	3000K-6500K	270°	40	49.5*40*30
XGY-SMD-G125-E15/20	Φ125*156	15/20W	80-180lm/W	3000K-6500K	270°	40	64.5*52*37

# LED SMD Bulbs



## T Series



T100

T100-ALU

CB CE ErP 



No Flicker



Dimmable Option



Ra80/90



15000-25000h



S: 220-240V



For Indoor



>0.5/>0.9



E27



E14

02



T37

T50

T100

T140

T160

T120

T80

T45

T30

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-T30-E6.5	Φ33*105	6.5W	80-180lm/W	3000K-6500K	200°	100	35.5*18.5*23.5
XGY-SMD-T37-E10	Φ37*107	10W	80-180lm/W	3000K-6500K	200°	100	39*20.5*22
XGY-SMD-T40-E10	Φ40*110	10W	80-180lm/W	3000K-6500K	200°	100	42*22*23
XGY-SMD-T50-E15	Φ51*150	15W	80-180lm/W	3000K-6500K	200°	100	53.5*27.5*32
XGY-SMD-T80-E20	Φ80*140	20W	80-180lm/W	3000K-6500K	200°	20	44*35*18
XGY-SMD-T100-E30	Φ100*185	30W	80-180lm/W	3000K-6500K	200°	20	54*43.1*22
XGY-SMD-T120-E40	Φ120*213	40W	80-180lm/W	3000K-6500K	200°	20	64*51*25
XGY-SMD-T140-E50	Φ140*252	50W	80-180lm/W	3000K-6500K	220°	18	45*44.5*53.5
XGY-SMD-T160-E60	Φ160*290	60W	80-180lm/W	3000K-6500K	220°	9	50.5*50.5*31.5

# LED SMD Bulbs

## LED Spot Lite (GU/MR Series)



CB CE ErP 



No Flicker



Dimmable  
Option



Ra80/90



15000  
-25000h



DC12V  
S: 220-240V



For Indoor



GU5.3



GU10

03



MR16-T1



MR16-T2



GU10-T1



GU10-T2

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-MR16 -E5/6/7	Φ50*58	5/6/7W	80-180lm/w	3000K-6500K	36°/110°	100	54*26.5*14.5
XGY-SMD-GU10 -E2/3/5/6/7/8	Φ50*58	2/3/5/6/7/8W	80-180lm/w	3000K-6500K	36°/110°	100	54*26.5*14.5



# LED SMD Bulbs



## LED Glass Spot Lite (GU Series)



CB CE ErP 



No Flicker



Dimmable  
Option



Ra80



15000  
-25000h



S: 220-240V



For Indoor



>0.4



GU10

04



GU10GP



GU10G



GU10GC



GU1035GC

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Useful Lumen 有效光通量	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-GU10G-E1.9 (ERP Class A)	Φ50*55.5	1.9W	340lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G-E2.2 (ERP Class B / LC Dim Opt.)	Φ50*55.5	2.2W (LCDIM)	350lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / LC Dim Opt.)	Φ50*54	4.5W (LCDIM)	400lm	3000K-6500K	36°	100	27.5*27.5*25
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / Dim To Warm)	Φ50*54	4.5W (DTW)	400lm	2200K-3000K (DTW)	36°	100	27.5*27.5*25
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / S3D&CCTM)	Φ50*54	4.5W (100%/50%/10%)	400lm	2700K @ 100% 2500K @ 50% 2200K @ 10%	36°	100	27.5*27.5*25
XGY-SMD-GU1035GC-E3 (ERP Class F / LC Dim Opt.)	Φ35*46	3W (LCDIM)	220lm	3000K-6500K	36°	100	20*20*21.8
XGY-SMD-GU1035GC-E3 (ERP Class F / S3DIMM)	Φ35*46	3W (100%/50%/10%)	220lm	3000K-6500K	36°	100	20*20*21.8



# LED SMD Bulbs

## R Series



CB CE ErP  



No Flicker



Dimmable  
Option



Ra80/90



15000  
-25000h



S: 110-130V



For Indoor



E26



E12

05



R50



R80



R90



R63



R39

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-R39-E3/4	Φ39*67	3/4W	80-180lm/W	3000K-6500K	120°	200	42.5*22*30.5
XGY-SMD-R50-E5/7	Φ50*87	5/7W	80-180lm/W	3000K-6500K	120°	100	52*27*20
XGY-SMD-R63-E7/9	Φ63*99	7/9W	80-180lm/W	3000K-6500K	120°	100	63*33.5*23
XGY-SMD-R80-E10/12	Φ80*114	10/12W	80-180lm/W	3000K-6500K	120°	40	42*34*30
XGY-SMD-R90-E12/15	Φ90*121	12/15W	80-180lm/W	3000K-6500K	120°	40	47*38*34

# LED SMD Bulbs



## PAR Series



PAR30A

PAR30B

PAR30C

CB CE ErP  



No Flicker



Dimmable  
Option



Ra80/90



15000  
-25000h



S: 110-130V



For Indoor



E26

06



PAR30

PAR38

PAR20

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-PAR20-E8	Φ63*84	8W	80-180lm/W	3000K-6500K	24°/38°	100	67.5*34.5*20
XGY-SMD-PAR30-E12	Φ95*94	12W	80-180lm/W	3000K-6500K	24°/38°	50	51.5*51*21.5
XGY-SMD-PAR38-E18	Φ121*130	18W	80-180lm/W	3000K-6500K	24°/38°	24	52.5*39.5*29



# LED SMD Bulbs

## AR Series



CB CE ErP 



No Flicker



Dimmable  
Option



Ra80/90



15000  
-25000h



S: 220-240V



For Indoor



G53



GU10

07



AR111F-G53



AR111F-GU10



AR70F-GU10



AR111F-SMD-GU10



AR111F-COB-GU10



AR111F-SMD-GU10

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-AR70 -E7	Φ71*78	7W	80-180lm/W	3000K-6500K	12° / 24°	100	38*37.5*33.5
XGY-SMD-AR111 -E12/15	Φ113*80 Φ111*66	12W/15W	80-180lm/W	3000K-6500K	38°	50	59*24.5*42.5 59*24.5*38.5

# LED SMD Bulbs



## ED Series



CB CE ErP 



No Flicker



Dimmable  
Option



Ra80/90



25000h



S: 220-240V



For Indoor



E40



E27

08



ED105



ED120



ED90


Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-ED90-E30/40	Φ93*225 (235 @ E40 Base)	30/40W	80-180lm/W	3000K-6500K	300°	20	49*39*24.5 (25.5 @ E40 Base)
XGY-SMD-ED105-E50/55	Φ108*265 (275 @ E40 Base)	50/55W	80-180lm/W	3000K-6500K	300°	15	56.5*34.5*28.5 (29.5 @ E40 Base)
XGY-SMD-ED120-E60/70	Φ122*296 (306 @ E40 Base)	60/70W	80-180lm/W	3000K-6500K	300°	15	63.5*38.5*32 (33 @ E40 Base)



# Smart LED SMD Bulbs



WiFi & Bluetooth Control & Zigbee

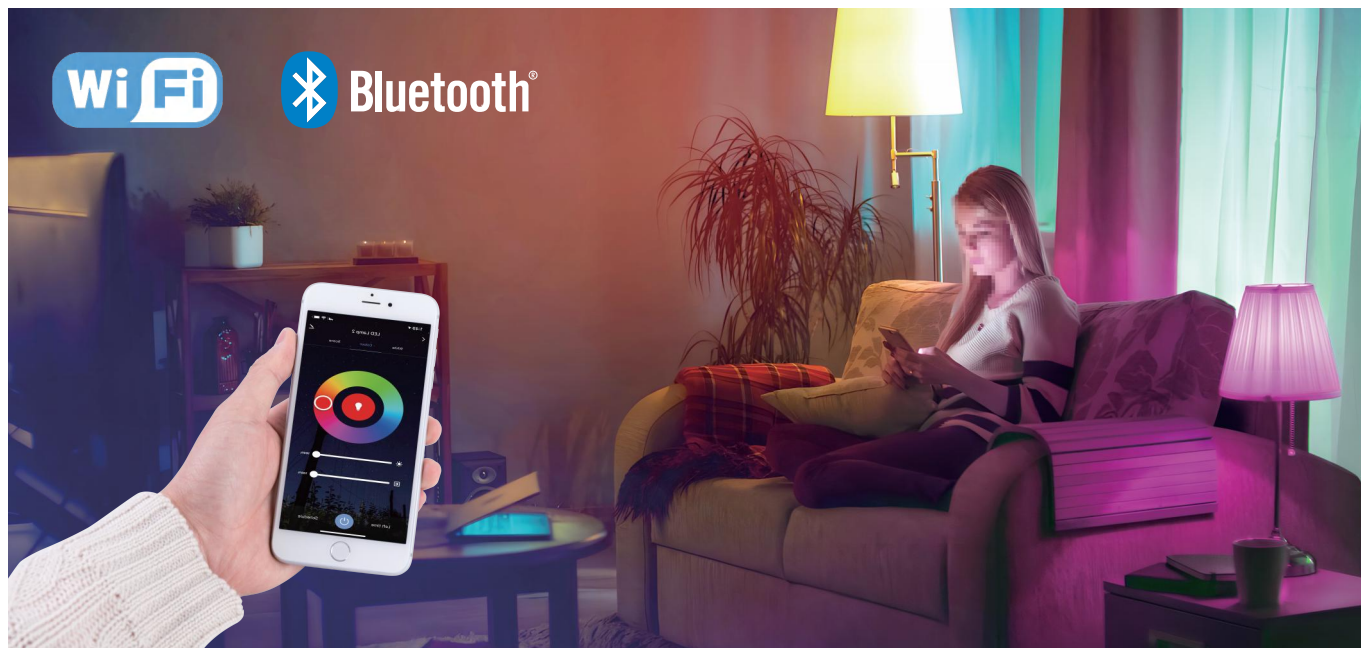

CB CE ErP



No Flicker



Dimmable Option



Ra80



15000-25000h



S: 85-265V



For Indoor

Mobile APP:



amazon echo



Google Home

APP: Tuya Smart



GU10



E26



E14

09



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-GU10-RGBCW-E5/6	Φ50*54/59	5/6W	70lm/W	RGBCW	38°/110°	100	54*26.5*14.5
XGY-SMD-C37-RGBCW-E5	Φ37*106	5W	90lm/W	RGBCW	220°	100	39*20.5*22
XGY-SMD-G45-RGBCW-E5	Φ45*90	5W	90lm/W	RGBCW	200°	100	47*24*20
XGY-SMD-A60-RGBCW-E9/12	Φ60*108/118	9/12W	90lm/W	RGBCW	200°	100	63*32.5*23.5
XGY-SMD-A70-RGBCW-E15	Φ70*131	15W	90lm/W	RGBCW	200°	20	37.5*37.5*30
XGY-SMD-G95-RGBCW-E13	Φ95*140	13W	100lm/W	RGBCW	200°	20	51*51*30.5
XGY-SMD-G120-RGBCW-E15	Φ120*158	15W	100lm/W	RGBCW	200°	20	63.5*63.5*30.5

# LED SMD Bulbs



## Microwave Sensor Series



CB CE ErP



No Flicker



Ra80/90



15000  
-25000h



S: 220-240V



For Indoor



E27



E14

10




C37



A60



G45

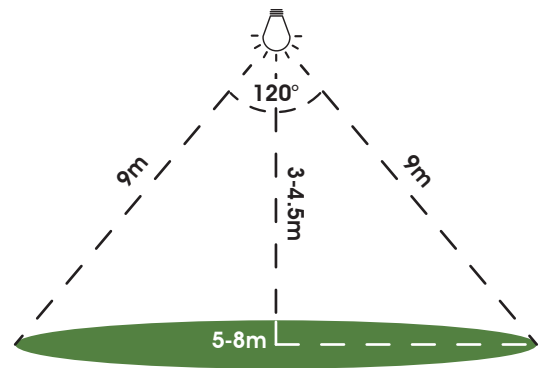

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-C37-MS-E5	Φ37*100	5W	90lm/W	3000K-6500K	270°	100	40*20*23
XGY-SMD-G45-MS-E5	Φ45*79	5W	90lm/W	3000K-6500K	270°	100	47*24*18.5
XGY-SMD-A60-MS-E5	Φ60*108	5W	90lm/W	3000K-6500K	270°	100	63*32.5*24
XGY-SMD-A60-MS-E9	Φ60*108	9W	90lm/W	3000K-6500K	270°	100	63*32.5*24
XGY-SMD-A60-MS-E11	Φ60*118	11W	90lm/W	3000K-6500K	270°	100	63*32.5*24



# LED SMD Bulbs

## Light Sensor Type



CB CE ErP 



No Flicker



Ra80/90



15000  
-25000h



S: 220-240V






For Indoor



E27

11

### Features:

-  Use High Quality Chips in ALU+PC Body, With High Diffusion PC Cover
-  High Quality Driver with Minimized Flickering
-  Light Sensor Only



<25 lux



>25 lux


Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-A60 -LS-E7/9	Φ60*108	7/9W	600lm/820lm	3000K-6500K	200°	100	63.5*32.5*26

# LED SMD Bulbs

Switch CCT Control



CB CE ErP SAA RoHS

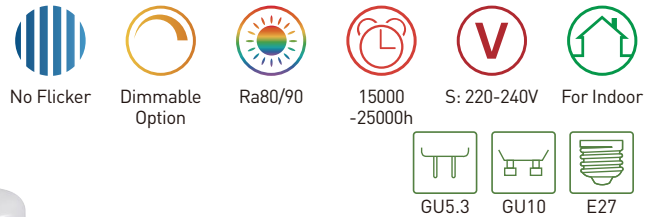

12



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-MR16-3CCT	Φ50*55	6W	80lm/W	3000K / 4000K / 6500K	36° / 110°	100	52*26.5*13.2
XGY-SMD-GU10-3CCT	Φ50*56	5/6/7W	80lm/W	3000K / 4000K / 6500K	36° / 110°	100	52*26.5*13.2
XGY-SMD-A60-3CCT	Φ60*108	9W	90lm/W	3000K / 4000K / 6500K	200°	100	62*31.5*23.5
XGY-SMD-A60-3CCT	Φ60*118	12W	90lm/W	3000K / 4000K / 6500K	200°	100	62*31.5*25.5
XGY-SMD-T37-3CCT	Φ37*115	8W	90lm/W	3000K / 4000K / 6500K	200°	100	39*20*25.5
XGY-SMD-T45-3CCT	Φ45*139	12W	90lm/W	33000K / 4000K / 6500K	200°	100	46*23.5*30.1

# LED SMD Bulbs

## Emergency Type



**3 Hours**  
BATTERY CAPACITY



**1200mAh**  
LITHIUM BATTERY

CB CE ErP 



No Flicker



Ra80



15000h



U:85-265V



For Indoor



E27



A70



A80



A60

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-A60-EMG	Φ60*125	5W	90lm/W	3000K-6500K	200°	100	32*32*52
XGY-SMD-A70-EMG	Φ70*135	7/9/12W	90lm/W	3000K-6500K	200°	100	37*37*54
XGY-SMD-A80-EMG	Φ80*145	9/12/15W	90lm/W	3000K-6500K	200°	100	40*40*60



# LED SMD Bulbs



## LED G4 Series



CB CE ErP



No Flicker



Dimmable  
Option



Ra>80



25000h



AC/DC12V



For Indoor





0.7

14

### Features:

- High Quality Body Material with Improved Heat Dissipation
- High Quality Driver with Minimized Flickering, Optional AC/DC Input
- High Quality LED 2835/5050 LED Chips
- Different Power & Lumen Efficacy Available
- Lifetime of 25,000 hrs. With 2 Years Warranty

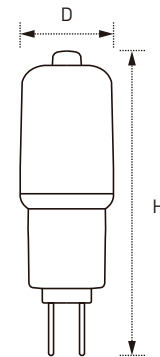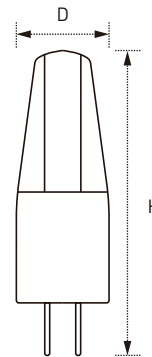

G4



#### XGY-G4-XH-001C-E1.2

Rated Power 额定功率 Color Temp. 色温 Total Lumen 光通量

1.2W 3000K-6500K 100lm

Dimension 发光角度 Body Material 灯体材质

10\*36 360° Silicon



#### XGY-G4-XH-002C-E1.8

Rated Power 额定功率 Color Temp. 色温 Total Lumen 光通量

1.8W 3000K-6500K 150lm

Dimension 发光角度 Body Material 灯体材质

13\*36 360° Silicon



### XGY-G4-XH-008C-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	150lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*38	320°	Silicon



### XGY-G4-XH-009C-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	220lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13.5*41.5	320°	Silicon



### XGY-G4-XH-0705C-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	110lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*34	320°	Silicon



### XGY-G4-XH-1505C-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	150lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*41.5	320°	Silicon



### XGY-G4-XH-1508C-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	220lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13.5*41.5	320°	Silicon



### XGY-G4-XH-801-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	180lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
10.5*37	360°	Ceramic



### XGY-G4-XH-802-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	180lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13*39	320°	PC



### XGY-G4-XH-803-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	150lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
10*30	320°	PC



### XGY-G4-XH-007-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	100lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
12*32	320°	PC



### XGY-G4-XH-008-E1.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.8W	3000K-6500K	150lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16*44	320°	PC



# LED SMD Bulbs

## LED G9 Series



CB CE ErP 



No Flicker



Dimmable  
Option



Ra>80



25000h



S:220-240V  
100-265V



For Indoor



0.4/0.9


16

### Features:

- ✘ High Quality Body Material with Improved Heat Dissipation
- ✘ High Quality Driver with Minimized Flickering, Optional AC/DC Input
- ✘ High Quality LED 2835/5050 LED Chips
- ✘ Different Power & Lumen Efficacy Available
- ✘ Lifetime of 25,000 hrs. With 2 Years Warranty



G9

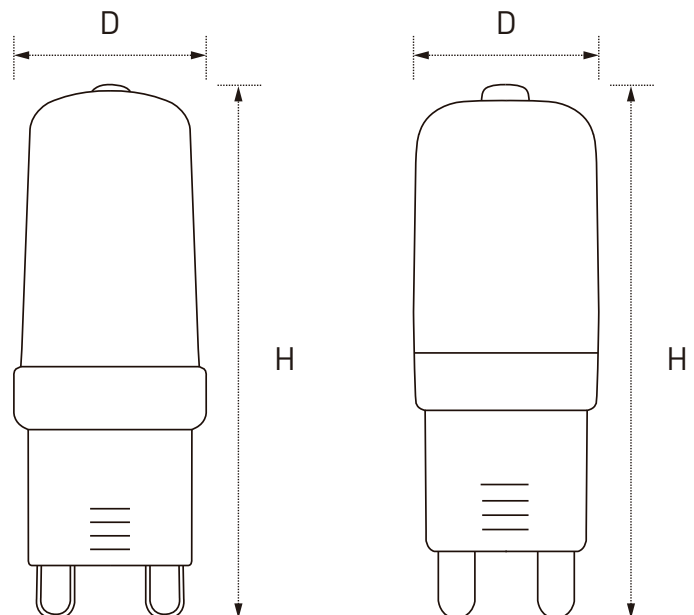



**XGY-G9-XH-005-E3**  
**XGY-G9-XH-006-E3.4**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W 3.4W	3000K-6500K	350lm 400lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16.5*50	360°	Thermal Conductive Plastic



**XGY-G9-XH-009-E4**  
**XGY-G9-XH-010-E4.8**  
**XGY-G9-XH-028-E4.8**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4W 4.8W 4.8W	3000K-6500K	470lm 550lm 700lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*56	360°	Thermal Conductive Plastic



**XGY-G9-XH-011-E4.8**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4.8W	3000K-6500K	630lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*56	360°	Thermal Conductive Plastic



**XGY-G9-XH-012-E3.3**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3.3W	3000K-6500K	370lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*59	320°	Thermal Conductive Plastic



**XGY-G9-XH-013-E3.8**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3.8W	3000K-6500K	450lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*59	320°	Thermal Conductive Plastic



**XGY-G9-XH-002-E3**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W	3000K-6500K	350lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
17*50	360°	Ceramic



**XGY-G9-XH-801-E2.5**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2.5W	3000K-6500K	280lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
15*42.5	360°	Ceramic



**XGY-G9-XH-022-E5.5**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
5.5W	3000K-6500K	700lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*65	360°	Ceramic



**XGY-G9-XH-027-E7**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
7W	3000K-6500K	880lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
21*72	360°	Ceramic



**XGY-G9-XH-018-E7**

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
7W	3000K-6500K	1000lm

Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
18.5*75	360°	Ceramic





### XGY-G9-XH-004-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	200lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16*48	320°	PC



### XGY-G9-XH-DIM-001-E3

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W	3000K-6500K	300lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
17*50	360°	Ceramic



### XGY-G9-XH-DIM-018-E6

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
6W	3000K-6500K	650lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
18.5*75	360°	Ceramic



### XGY-G9-XH-001-E2.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2.2W	3000K-6500K	250lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
14.5*60	320°	Glass



### XGY-G9-XH-002-E4

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4W	3000K-6500K	500lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
14.5*65	320°	Glass



### XGY-E14-P-XH-001-E3.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3.5W	3000K-6500K	350lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
17.5*52.5	360°	Ceramic



### XGY-E14-P-XH-003-E4

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4W	3000K-6500K	470lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16*64.5	360°	Ceramic



### XGY-E14-P-XH-005-E5.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
5.5W	3000K-6500K	720lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
18.5*73.5	360°	Ceramic



### XGY-E14-P-XH-004-E7

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
7W	3000K-6500K	1055lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
18.5*83.5	360°	Ceramic



### XGY-E14-PC-XH-001-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	200lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
22*50	360°	PC

# LED SMD Bulbs

## LED R7S Series



CB CE ErP 



No Flicker



Dimmable  
Option



Ra80/90  
/97





15000  
-25000h



S: 220-240V



For Indoor

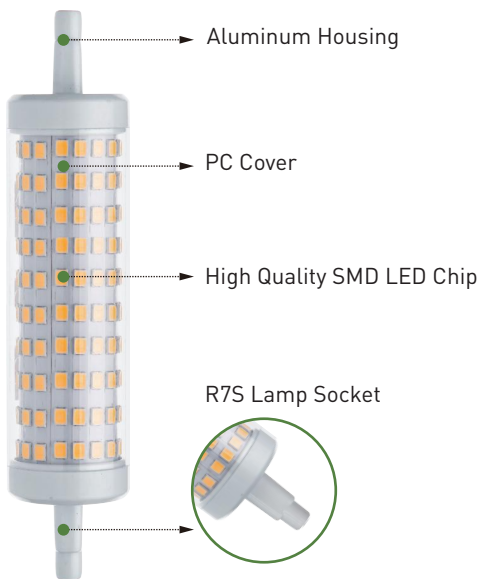

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-R7S-78-E5	Φ25*78	4.5W	80-150lm/W	3000K-6500K	270°	300	43.5*28*19.5
XGY-R7S-118-E8	Φ25*118	8W	80-150lm/W	3000K-6500K	270°	200	30.5*29*28
XGY-R7S-135-E11	Φ25*135	11W	80-150lm/W	3000K-6500K	270°	200	30.5*29*31.5